

CEMENTING HEAD


Cementing Head

Cementing Head is a special tool for pumping slurry and releasing plug, and cementing Head is used as wellhead unit in all kinds of cementing operation. The types of Cementing Head are various as Single-plugs, Double-plugs, Multi-Plugs, drill pipe cementing head and so on.

Single-plug Cementing Head

Technical specifications of Single Plug Cementing Head

Dimension	13-3/8	10-3/4	9-5/8	7-5/8	7	5-1/2
Overall Length (mm)	1,959	1,973	1,895	1,605	1,605	1,523
Rated Pressure (MPa)	35	50				
Manifold Connection	2" Union					
I.D. of Plug Container(mm)	320	250	225	176	160	125
Length of Plug Container (mm)	685	625	550	480	480	430

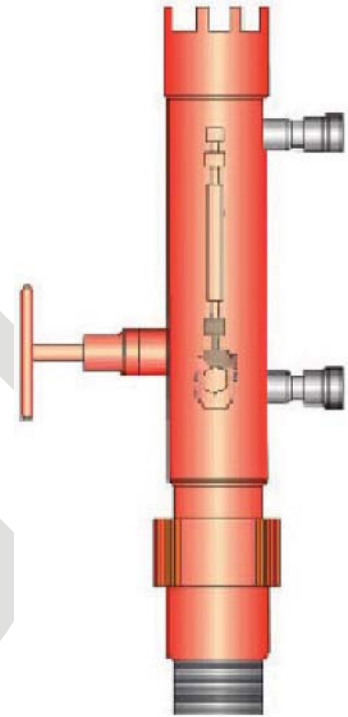


Single-plug cementing Head

Double-plug Cementing Head

Technical Specifications of Double-plug Cementing Head

Dimension (in)	13-3/8	10 3/4	9 5/8	7 5/8	7	5 1/2
Overall Length(mm)	2,770 (2,290)	2,723 (2,283)	2,606 (2,165)	(2,257)	(2,177)	(2,045)
Rated Pressure(MPa)	35	50				
Manifold Connection	2" Union					
I.D. of Plug Container(mm)	320	250	225	176	160	125

Note: The overall lengths shown in brackets are for drill pipe cementing heads without lift joints.

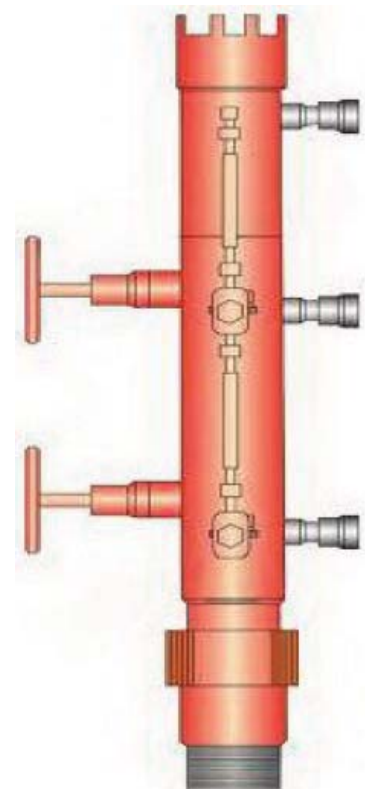


Double-plug Cementing Head

Drill Pipe Cementing Head

Technical Specifications of Drill Pipe cementing Head

Dimension (in)	5 1/2	5	3 1/2	2 7/8
Overall Length(mm)	1,937	1,890 (1,344)	1,654 (1,090)	910
Rated Pressure(MPa)	2" Union			
Manifold Connection	405		340	394
I.D. of Plug Container(mm)	118	100	72	52
Note: The overall lengths shown in brackets are for drill pipe cementing heads without lift joints.				

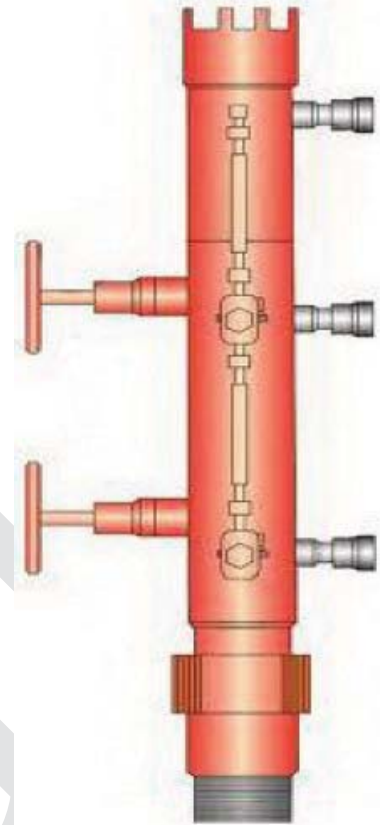

Drill Pipe Cementing Head