


KELLY

Kelly

Kelly is effective tool to connect the topmost joint of drill pipe to turn the drill stem when the rotary table runs.

PPGL supplies 2 kinds of kelly, i.e. square kelly and hexagonal kelly.

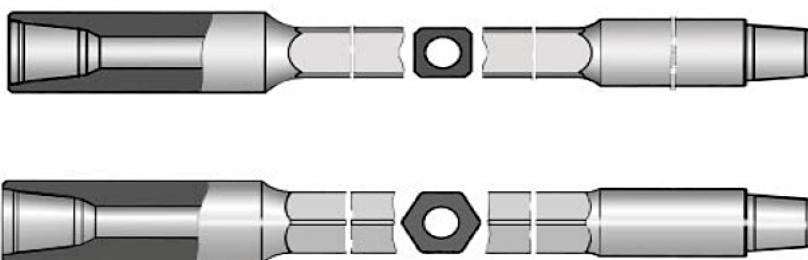

Technical Specification of Kelly

Kelly Size		Length Mm	Upper box connection				Lower Pin Connection		ID	Driving Section		
mm	in		Type(LH)		O.D.		Thread	OD		Cross Flat	For Squar	Cross corner for Hex
			Std	Optional	Std	Optional						
63.5	2-1/2	12.19	6-5/8REG	4-1/2REG	196.8	146		85.7	31.8	63.5	83.3	
76.2	3	12.19	6-5/8REG	4-1/2REG	196.8	146	NC26	104.8	44.4	76.2	100	85.7
88.9	3-1/2	12.19	6-5/8REG	4-1/2REG	196.8	146	NC31	120.6	57.2	88.9	115.1	100.8
108	4-1/4	12.9	6-5/8REG	4-1/2REG	196.8	146	NC38	158.8	71.4	108	141.3	122.2
							NC38	161.9	71.4	108	141.3	122.2
133.4	5-1/4	12.9	6-5/8REG	4-1/2REG	196.8	146	NC46	177.8	82.6	133.3	175.4	151.6
							NC50	177.8	82.6	133.3	175.4	151.6
152.4	6	12.9	6-5/8REG		196.8	146	5-1/2FH			152.4		173
							NC56			152.4		173